



A MATHEMATICAL MODEL AND DYNAMIC ANALYSIS OF ANAEROBIC DIGESTION OF SOLUBLE ORGANIC FRACTION OF MUNICIPAL SOLID WASTE TOWARDS CONTROL DESIGN

UN MODELO MATEMÁTICO Y ANÁLISIS DINÁMICO DE DIGESTIÓN ANAEROBIA DE LA FRACCIÓN ORGÁNICA SOLUBLE DE RESIDUOS SÓLIDOS MUNICIPALES ORIENTADO AL DISEÑO DE CONTROL

R.A. Flores-Estrella^{1*}, A. Estrada-Baltazar², R. Femat¹

¹*IPICYT, División de Matemáticas Aplicadas, Camino a la Presa de San José Apdo. Postal 2055, Col. Lomas 4a Sección, San Luis Potosí, S.L.P., México.*

²*Departamento de Ingeniería Química, Instituto Tecnológico de Celaya, Celaya, Gto. CP 38010, México.*

Received July 8, 2015; Accepted February 2, 2016

Abstract

A dynamical model for anaerobic digestion (AD) is proposed for the soluble organic fraction of solid waste. The model is proposed with the purpose of showing the feedback control of the process. The control scheme concerns the output regulation of the organic matter effluent by achieving desired operation conditions, which are featured by the operational stability. The operating conditions for the digester correspond to organic matter degradation and are named *normal operating conditions*, which are computed from nontrivial equilibrium. Both the acidogenic and the methanogenic stages are considered in dynamical model; including substrate and product inhibition. A PI feedback control is designed in order to illustrate the control problem is solvable.

Keywords: anaerobic digestion, soluble organic fraction of municipal solid waste, dynamical model.

Resumen

Un modelo dinámico para digestión anaerobia es propuesto para la fracción orgánica soluble de residuos sólidos urbanos. El modelo es propuesto con el propósito de mostrar una ley de control del proceso. El esquema de control consiste en la regulación de la materia orgánica efluente como señal de salida mediante el mantenimiento de condiciones deseadas, las cuales incluyen la estabilidad operacional. Las condiciones de operación para el digester corresponden a la degradación de la materia orgánica y son llamadas *condiciones normales de operación*, las cuales son calculadas de un equilibrio no trivial. El modelo dinámico considera las etapas acidogénica y metanogénica; substrato y la inhibición por producto. Un control PI retroalimentado es diseñado para ilustrar que el problema de control es resoluble.

Palabras clave: digestión anaerobia, fracción orgánica soluble de residuos sólidos municipales, modelo dinámico.

1 Introduction

Anaerobic digestion (AD) has recently gained considerable importance as a waste treatment technology to reduce organic matter in agro-food industries and municipal effluents. The AD process presents advantages compared to aerobic treatment as: short hydraulic retention times, low sludge production, high organic load removal, and low initial and operating cost. Recently, much attention has been paid to AD of the organic fraction of municipal solid waste (OFMSW) as an attractive option technology for efficient treatment and simultaneous production of a renewable energy source through the use of

biogas (Mata-Alvarez *et al.*, 2000). Nevertheless, its widespread application has been limited, because of the complexity of the process, and difficulties involved in achieving a desirable operation of the AD process. All these aspects can be overcome with the development and improvement of instrumentation and control systems (Jimenez *et al.*, 2015; Méndez-Acosta *et al.*, 2008). Moreover, with a suitable dynamic model it is possible to evaluate the AD process behavior and to formulate and evaluate control strategies. These models are also used in the modeling, identification, design, optimization, and on-

*Autor para la correspondencia. E-mail: flores.estrella.ra@gmail.com

line monitoring of AD process (Gómez-Acata *et al.*, 2015; Cuevas-Ortiz *et al.*, 2015).

The availability of a simple AD model is desired as it captures the complexity of the process, and allowing the sustained operation under a feedback control law. Because of this, many studies have been devoted to this aim. Kiely *et al.* (1997) proposed a nonlinear dynamical model of AD of OFMSW based on three previous models (Hill and Barth, 1977; Moletta *et al.*, 1986; Havlik *et al.*, 1986). The model includes: hydrolysis, acidogenic and methanogenic processes, the growth kinetics of acidogenic and methanogenic bacteria; also considered equilibrium between CO_2 and HCO^- , cations and NH^{+4} ; finally inhibition by ammonia in the growth kinetics of methanogenic bacteria were also considered. Esposito *et al.* (2008) described the dynamical anaerobic co-digestion processes of OFMSW and sewage sludge. The model (Esposito *et al.*, 2008) describes the surface based kinetic behavior of the OFMSW disintegration process. From this seminal idea several studies have been reported which include model calibration and validation (Esposito *et al.*, 2011a), effect of the organic loading rate (Esposito *et al.*, 2011b) and enhanced bio-methane production from co-digestion. Other contributions are based on distributed parameters. In this sense, Vavilin *et al.* (2003) and Nopharatana *et al.* (2003) take into account the change of a set of parameters in the mathematical model involving the flow liquid inside of the digester. Kinetic modeling have been also reported for batch process of AD of MSW (Nopharatana *et al.*, 2007) and semicontinuous OFMSW (Fernandez *et al.*, 2010) under specific operational conditions. Pavan *et al.* (2000) reported the kinetic study of a two-phase AD process using diffusional models; in addition, a comparison with a single phase system is also carried out.

A theoretical principle states that the set of operational conditions for AD process allows one to set operational condition and, after that, to propose feedback schemes to control and preserve such operational conditions. Nevertheless, in order to predict how the system responds during or after a change of operational conditions is convenient a mathematical model. The analysis of the dynamical model allows us to formulate changes of operational conditions and control strategies for the AD process (Nopharatana *et al.*, 2003). Although, Alatiqi *et al.* (1994) analyzed AD mesophilic and thermophilic processes schemes in terms of stability and controllability, it is not clear yet

the role of the inhibition phenomenon. In same direction, Bolzonella *et al.*, (2003) studied the variations of the process parameters during transient conditions and identified dynamical behavior between changes of stable conditions and parameter behavior; nevertheless, there are not predictions of key variables under an inhibition scenario.

Although several mathematical models reported describe the AD process of organic solid phase (Kiely *et al.*, 1997; Esposito *et al.*, 2008; Fernandez *et al.*, 2010), a model is desirable such that operational conditions can be captured and control strategies can be formulated in face to diverse scenarios. Because of operational stability of the AD process is largely dependent on the accumulation of VFA, a model should include the dynamical behavior of VFA inhibitory phenomenon. To our knowledge, only a few contributions, among those that have addressed the VFA accumulation, have identified acidification as open-loop stable operational condition (Méndez-Acosta *et al.*, 2008; Myint *et al.*, 2007). Moreover, the problem of the operational instability due to the accumulation of VFA remains open. In this study a mathematical modelling of AD process and mathematical analysis is addressed towards control design. The first objective is the design a mathematical model as simple as possible in terms of main key variables. The technical difficulty resides in the capability of the model to captures the dynamics of the main operation conditions of real continuous AD process as washout condition, acidification condition and normal operation condition. The second objective is the design a control scheme that is capable of regulating the VFA concentration in continuous AD process.

This contribution is organized as follows. A reduced dynamical model is proposed and dynamic features are exposed and analyzed in Section 2. In Section 3, a control problem is formulated for a continuous AD of OFMSW process. Then, in Section 4, a PI classical feedback controller is derived and some simulations are shown in order to illustrate the performance of the controller. Finally, some concluding remarks are addressed.

2 Model description

The dynamical model is derived from previous proposals (Hill and Barth, 1977; Moletta *et al.*, 1986; Kiely *et al.*, 1997). The model describes the dynamical behavior of AD process of OFMSW through a set of

nonlinear ordinary differential equation (ODE). Each ODE is based on mass balance of components of the continuous isothermal AD process. For overall AD for OFMSW includes four steps: hydrolysis, acidogenesis, acetogenesis and methanogenesis. The hydrolysis is recognized as the rate-limiting step for overall AD process, while methanogenesis is the rate-limiting step for easily biodegradable substrates (Ariunbaatar et al., 2014; Fernández-Güelfo et al., 2011). The separation of the hydrolytic stage from the methanogenic enhances a stable development of each biochemical reaction, promoting organic matter degradation and biogas production. Pretreatment for the organic solid fraction and OFMSW might be needed in order to ensure the transformation of insoluble organics matter to soluble compounds (Ariunbaatar et al., 2014; Cesaro et al., 2014). Thus, the hydrolysis stage is neglected in the model but assumed to be performed at previous pretreatment stage.

The relation among microorganisms and substrates is defined by mass balances under isothermal condition. Four substrates are considering: soluble organic mater, volatile fatty acids, ammonia and methane. Acidogenic and methanogenic bacteria are included in the model. The inhibition by volatile fatty acids has been considered into the specific grow rate of acidogenic bacteria. In addition, ammonia and volatile fatty acids inhibition are included into the specific grow rate of methanogenic bacteria. The processes start with the degradation of organic soluble matter. Continuous production of soluble organic matter is supposed by the enzymatic action of the acidogenic bacteria. In the next stage, acidogenic bacteria produces a series of acids. Nevertheless, only acetic acid is considered in the model. Finally, acetoclastic methanogenic bacteria converts acetic acid to methane. The pH is assumed constant and the ionic dilute equilibrium is preserved. The pressure is assumed constant $P = P_{atm}$; which means that despite of the fact that there is a continuous production of mixture of gases (CH_4 , CO_2 , NH_3) the pressure of the AD process is maintained to P_{atm} . Then, the produced mixture of gases is assumed to go directly out of the digester. The NH_3 production rate is supposed less than methane and carbon dioxide rates. During biochemical reactions CO_2 is also produced. Nevertheless, as operating conditions (pH, temperature and pressure) and ionic equilibrium are preserved, the relation between CH_4 and CO_2 is assumed constant. Then, CO_2 and NH_3 gas production rate are not modeled. Under above

assumptions and conditions, the dynamical behavior for acidogenic biomass is described by (Hill and Barth, 1977; Moletta et al., 1986):

$$\frac{dX_1}{dt} = (\mu_1 - K_{D1} - D)X_1 \quad (1)$$

where X_1 is the acidogenic biomass [mg/l]; K_{D1} is related to the death rate of acidogenic biomass [d^{-1}]; D is the dilution rate [d^{-1}]; and μ_1 is the specific growth rate of acidogenic biomass [d^{-1}] defined by (Kiely et al., 1997):

$$\mu_1 = \frac{\mu_{1,max}}{1 + \frac{K_{S1}}{S_O} + \frac{V_A}{K_{Ia1}}} \quad (2)$$

where $\mu_{1,max}$ stands for the maximum specific growth rates [d^{-1}]; K_{S1} denotes the saturation constant for the acidogenic bacteria growth [mg/l]; K_{Ia1} is the inhibition constant of acidogenic bacteria growth [mg/l] which is related to volatile acid inhibition; S_O is the soluble organic matter concentration [mg/l]; and V_A is the volatile acid concentration [mg/l]. The dilution rate D [d^{-1}] is defined as the ratio of the inlet flow rate Q_{in} [ld^{-1}] respect to the reactor volume V [l]. The dynamic description for methanogenic biomass is described by (Hill and Barth, 1977; Moletta et al., 1986):

$$\frac{dX_2}{dt} = (\mu_2 - K_{D2} - D)X_2 \quad (3)$$

where X_2 is the methanogenic biomass [mg/l]; K_{D2} is related to the death rate of methanogenic biomass [d^{-1}]; D is the dilution rate [d^{-1}]; and μ_2 is the specific growth rate of methanogenic biomass [d^{-1}] defined by (Kiely et al., 1997):

$$\mu_2 = \frac{\mu_{2,max}}{1 + \frac{K_{S2}}{V_A} + \frac{V_A}{K_{Im1}} + \frac{NH_3}{K_{Im2}}} \quad (4)$$

where $\mu_{2,max}$ is the maximum specific growth rates [d^{-1}]; K_{S2} is the saturation constant for the methanogenic bacteria growth [mg/l]; K_{Im1} is the inhibition constant of methanogenic bacteria growth [mg/l] which is related to volatile acid inhibition; K_{Im2} is the inhibition constant of methanogenic bacteria growth [mg/l] which is related to inhibition by ammonia. The mass balance of the first stage is the dynamic of soluble organics S_O [mg/l] consists of the following terms: (i) inlet-outlet mass balance related with dilution rate D ; (ii) consumption by acidogenic bacteria with a yield coefficient Y_{X1} [mg X_1 /mg S_O]; and (iii) production by acidogenic bacteria with a yield coefficient Y_{X1S_O} [mg X_1 /mg S_O] (Hill and Barth, 1977).

$$\frac{dS_O}{dt} = (S_{O,in} - S_O)D - \frac{\mu_1 X_1}{Y_{X1}} + \frac{\mu_1 X_1}{Y_{X1S_O}} \quad (5)$$

The mass balance of the volatile organic acids V_A [mg/l] consists of the following terms: (i) inlet-outlet mass balance related to the dilution rate D ; (ii) production by acidogenic bacteria with a yield coefficient Y_{X1VA} [mg X_1 /mg V_A]; and (iii) consumption by methanogenic bacteria with a yield coefficient Y_{X2VA} [mg X_2 /mg V_A] (Hill and Barth, 1977).

$$\frac{dV_A}{dt} = D(V_{A,in} - V_A) + \frac{\mu_1 X_1}{Y_{X1VA}} - \frac{\mu_2 X_2}{Y_{X2VA}} \quad (6)$$

The mass balance of NH_4 [mg/l] consists of: (i) inlet-outlet mass balance related to the dilution rate D ; and (ii) production by acidogenic bacteria with a yield coefficient Y_{NH4} [mg X_1 /mg NH_4] (Kiely et al., 1997).

$$\frac{dNH_4}{dt} = D(NH_{4,in} - NH_4) + \frac{\mu_1 X_1}{Y_{NH4}} \quad (7)$$

As low pressure operation and diluted system condition is assumed, mass transference of NH_3 between liquid and gaseous phases is neglected. Then, the term related to gas-liquid mass transference of ammonia is not included in equation (7) (Kiely et al., 1997).

Because of both ionic equilibrium and pH constant value are assumed, a linear relation between NH_3 and NH_4 is defined by:

$$NH_3 = NH_4 K_{NH4} = NH_4 \frac{K_{iNH4}}{H^+} \frac{M_{NH3}}{M_{NH4}} \quad (8)$$

where NH_3 is the concentration of ammonia [mg/l]; NH_4 is the concentration of ammonium [mg/l]; K_{NH4} is a constant which consist of the following parameters: $K_{iNH4} = 5.3 * 10^{-10}$ @ 35 °C the ionization constant; $[H^+]$ is the hydrogen ion concentration ($pH = -\log[H^+]$); and the mol weight of NH_3 and NH_4 stand for M_{NH3} and M_{NH4} respectively. For the proposes of this work the pH is considered constant ($pH = 7.0$).

The methane gas flow $[(l_{CH4}/l_{reactor})d^{-1}]$ is described by the following algebraical equation (Kiely et al., 1997):

$$Q_{CH4} = \mu_2 X_2 Y_{CH4X2} \frac{S_V}{M_{X2}} \quad (9)$$

where Y_{CH4X2} is the yield coefficient for methane forming bacteria [mol CH_4 /mol org]; $S_V = 25.4$ [l/mol @ 35 °C] is the standard volume; and $M_{X2} = 111300$ [mg org/mol org] is the mole weight of organisms (Hill and Barth, 1977). Under temperature and pressure operating conditions there is very low solubility of methane in the liquid phase. Therefore,

methane in liquid phase is neglected. Then, the AD model is defined by a set of differential equations:

$$\dot{\Phi} = f(\Phi, \Pi), \quad \Phi(t_0) = \Phi_0 \quad (10)$$

which describes the dynamical behavior of AD process for OFMSW, where the states variables stand for $\Phi = [X_1, X_2, S_O, V_A, NH_4]$ and an algebraic relation of CH_4 production. The set of parameter $\Pi = \{\mu_{1max}, \mu_{2max}, K_{D1}, K_{D2}, Y_{X1}, Y_{X1SO}, Y_{X1VA}, Y_{X2VA}, Y_{NH4}, K_{S1}, K_{S2}, K_{Ia1}, K_{Im1}, K_{Im2}, K_{NH4}\}$ are real and uncertain constants. The nominal values $\pi_0 \in \Pi$ and additional parameters are shown in Table 1.

Departing from AD model (10) a complementary analysis is desirable to determine which parameters in Π affect the dynamical behavior of the field $f(\Phi, \Pi)$. Then, to address the behavior of $f(\Phi, \Pi)$ if the parameter values have changed, a sensitivity parametric analysis (Khalil, 2002) has to be done. For a set of parameters Π , the approximate solution for the sensitivity function $S_f(t) = \Phi_{\Pi}(t, \pi_0)$ is computed by the simultaneous solution of the nonlinear nominal AD model (10) and the linear time-varying sensitivity equation (Khalil, 2002):

$$\begin{aligned} \dot{\Phi} &= f(\Phi, \pi_0), \quad \Phi(t_0) = \Phi_0 \\ S'_f &= \left[\frac{\partial f(\Phi, \Pi)}{\partial \Phi} \right]_{\pi_0} S_f + \left[\frac{\partial f(\Phi, \Pi)}{\partial \Pi} \right]_{\pi_0}, \quad S_f(t_0) = 0 \end{aligned} \quad (11)$$

where $S_f \in R^{5 \times 15}$. The Fig. 1 shows the solution of equation (11) respecting to parameter set Π (Table 1), nominal operating condition (Table 2) and initial condition $\Phi_0 = [1, 1, 1, 1, 1]^T$. The parameters subset having the most significant effect on dynamical behavior of AD model (10) are μ_{1max} , μ_{2max} , K_{D1} , K_{D2} , K_{S1} , K_{S2} , K_{Im2} and K_{NH4} . The parameters subset is in agree with the results reporter for Kiely et al. (1997).

3 Open loop dynamical behavior

In order to compare qualitatively the AD model (10) with literature an example of open loop simulations are shown in Fig. 2. The nominal parameters $\pi_0 \in \Pi$ (Table 1) and the nominal operating condition (Table 2) are used for open loop simulation. Two initial condition $\Phi(t_0) = \Phi_0$ were explored. Case one stands for the following initial condition $\Phi_0 = [0.2, 0.1, 10, 1, 0.5]^T$ [g/l]; and case two stands for the initial condition $\Phi_0 = [0.2, 0.1, 10, 2, 0.5]^T$ [g/l]. For case one, the trajectories of the states variables converge at

desirable state steady $X_1^* \neq 0$, $X_2^* \neq 0$ and $S_O^* < S_{O,in}$, $V_A^* < V_{A,in}$, $NH_4^* < NH_{4,in}$ and $Q_{CH_4} > 0$ for all $t > 0$ (* denotes the equilibrium value). However, for case two the trajectories of the states variables converge at undesirable state steady $X_2^* = 0$, $V_A^* > V_{A,in}$ and $Q_{CH_4} = 0$ for all $t \geq 200 d$. Despite of the fact that values of parameters and operation condition are not always valid for a specific composition of OFMSW the qualitative behavior of the states variables are similar to results obtained from literature (Hill and Barth, 1977; Kiely et al., 1997) in the sense of *stabilized* and *failed* condition based on volatile acid concentration and CH_4 production.

Then, for the same operation condition, it is possible to converge at these two state steady with a set of two different initial conditions. In order to determine convergence to a specific steady state is convenient a dynamical analysis of the equilibrium coordinates. Then, departing from physical properties of the process, equilibrium points stability properties are discussed.

4 The anaerobic digester operating conditions

The following operating conditions can be defined for the anaerobic digester:

- *Washout condition.* It is said that a digester is operating in washout condition as the biomass is inactive ($X_1 = 0$, $X_2 = 0$ for all $t \geq 0$) and the remaining states are given by its inlet composition ($S_O = S_{O,in}$, $V_A = V_{A,in}$, $NH_4 = NH_{4,in}$ for all $t \geq 0$). Such condition means that the polluting compounds within the inlet flow are not reduced by the biomass. This operation conditions is undesirable. Then, in order to avoid it, an operational constrain is imposed to inlet flow or dilution rate (D). As a consequence, upper operational value is defined as $D^* < \overline{D_w}$, where D^* is the actual operational dilution rate and D_w is the dilution rate where washout condition appears.

Table 1. Specifications for parameters. *HB* means obtained from Hill and Barth, (1977); and *K* from Kiely et al. (1997). Notice that K_{NH_4} comprises several parameters (see (8))

Symbol	Constant	Value	Unit	Source
Nominal values $\pi_0 \in \Pi$				
μ_{1max}	maximum specific growth rate X_1	0.4	d^{-1}	<i>HB</i>
μ_{2max}	maximum specific growth rate X_2	0.4	d^{-1}	<i>HB</i>
K_{D1}	specific death rate of X_1	0.025	d^{-1}	<i>HB</i>
K_{D2}	specific death rate of X_2	0.04	d^{-1}	<i>HB</i>
Y_{X1}	yield coefficient	0.2	$mg X_1/mg S_O$	<i>HB</i>
Y_{X1SO}	yield coefficient of S_O for X_1	0.243	$mg X_1/mg S_O$	<i>HB</i>
Y_{X1VA}	yield coefficient of V_A for X_1	2.45	$mg X_1/mg V_A$	<i>HB</i>
Y_{X2VA}	yield coefficient of V_A for X_2	0.06	$mg X_2/mg V_A$	<i>HB</i>
Y_{NH_4}	yield coefficient of NH_4 for X_1	0.1212	$mg NH_4/mg X_1$	<i>HB</i>
K_{S1}	saturation constant for the X_1	25	mg/l	<i>HB</i>
K_{S2}	saturation constant for the X_2	150	mg/l	<i>HB</i>
K_{Ia1}	inhibition constant of X_1	1000	mg/l	<i>HB</i>
K_{Im1}	inhibition constant of X_2	300	mg/l	<i>HB</i>
K_{Im2}	inhibition constant of X_2	5	mg/l	<i>HB</i>
K_{iNH_4}	ionization constant	5.3×10^{-10}	@ 35 °C	<i>K</i>
M_{X2}	mol weight of X_2	111300	$mg org/mol org$	<i>K</i>
Additional parameters				
M_{NH_3}	mol weight of NH_3	17.03	$g/g mol$	
M_{NH_4}	mol weight of NH_4	18.05	$g/g mol$	
S_v	standard volume of ideal gas	25.4	$l/mol @ 35 °C$	
K_{NH_4}	constant	0.005	@ 35 °C	
pH		7.0		

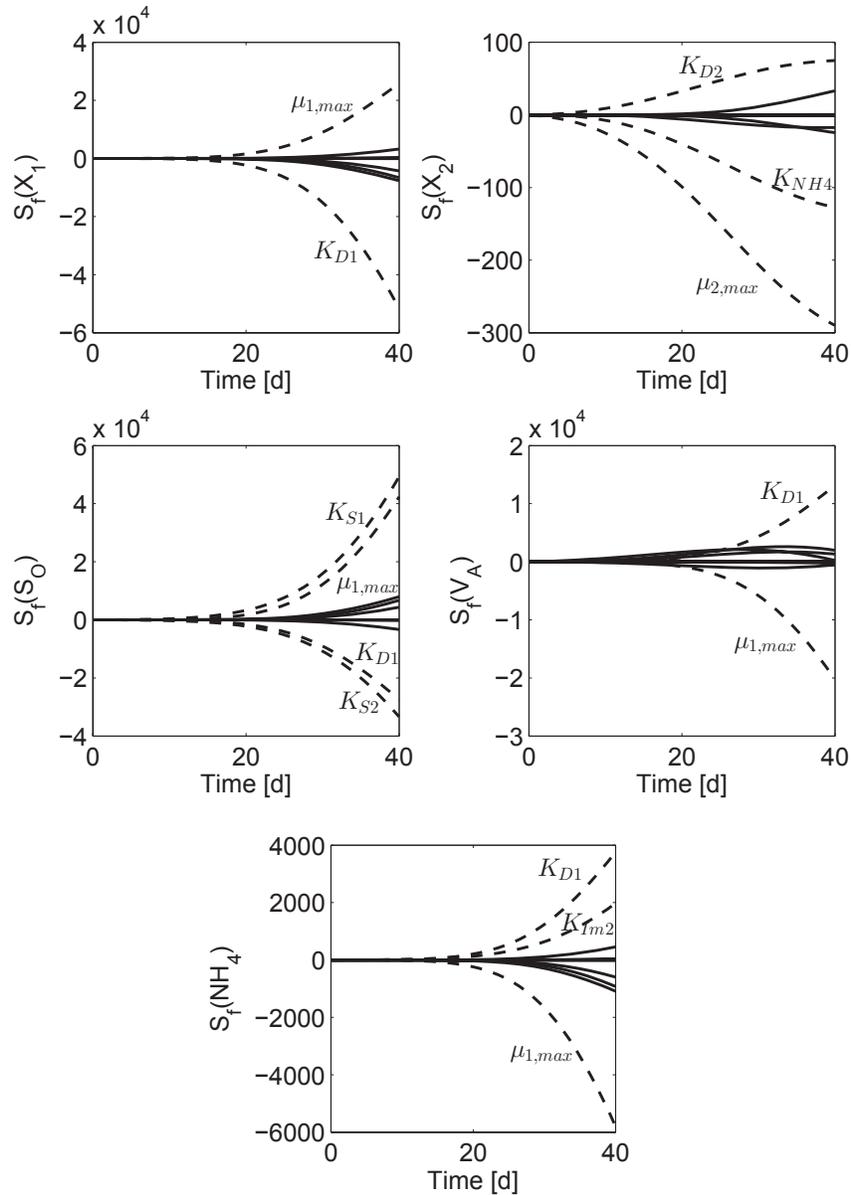


Fig. 1. Numerical solution of the sensitivity function equation (11). Notice that, the parameters subset having the most significant effect on dynamical behavior of AD model (10) are $\mu_{1,max}$, $\mu_{2,max}$, K_{D1} , K_{D2} , K_{NH4} , K_{S1} , K_{S2} and K_{Im2} .

Table 2. Specifications for nominal operating condition.

Symbol	Value	Unit
$S_{0,in}$	15.0	g/l
$V_{A,in}$	0.5	g/l
$NH_{4,in}$	0.5	g/l
D	0.01	d^{-1}

- *Acidification condition.* It is said that a digester is operating in acidification condition (AC) as the only methanogenic biomass is inactive ($X_1 > 0$, $X_2 = 0$ for all $t \geq 0$), accumulation of VFA is maintained ($V_A > V_{A,in}$) and some amount of organic matter is treated ($S_O < S_{O,in}$, $NH_4 < NH_{4,in}$) for all $t \geq 0$.

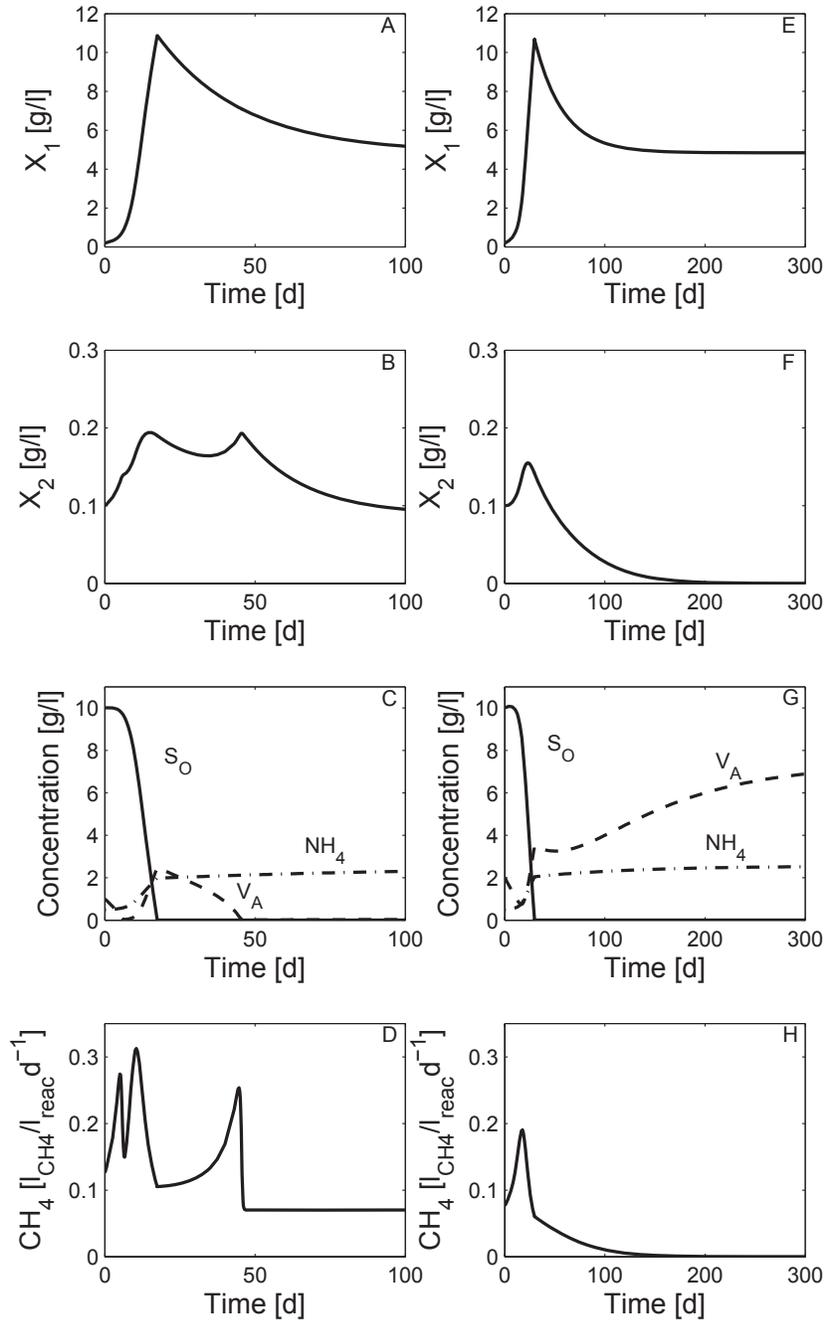


Fig. 2. Numerical solution of the AD model (10) with a set of nominal parameter $\pi_0 \in \Pi$ (Table 1) and nominal operational condition (Table 2). ABCD) case one stand for initial condition $\Phi_0 = [0.2, 0.1, 10, 1, 0.5]^T$ [g/l]. EFGH) case two stand for initial condition $\Phi_0 = [0.2, 0.1, 10, 2, 0.5]^T$ [g/l].

In other words, this means that the polluting compounds within the wastewater are partially removed by acidogenic bacteria. Accumulation of VFA causes inhibition the methanogenic biomass and only acidogenic biomass is

active, as a consequence there is not methane production ($Q_{CH_4} = 0$). It should be note that in real-life experiments, an anaerobic digester can has VFA accumulation with consequent acidification of bioreactor, thus a possible

failure (i.e. washout condition). In order to avoid acidification condition, a reduction of dilution rate is done while a methane conversion inefficiency is noticed. This prevents the biomass from short-term stress/inhibition and provides some time to human operators to fix the problem. Note that, in most of real-life experiments it is not identified the upper value restriction of inlet flow or D^* which allow to prevent this condition, nevertheless there is a knowledge that this value is lower than D_w .

- *Normal operation condition.* It is said that a digester is operating in Normal operation condition (NOC) as the biomass is active ($X_1 > 0, X_2 > 0$ for all $t \geq 0$) and the remaining states accomplish $S_O < S_{O,in}$, and $V_A < V_{A,in}$. Then, a fraction of organic matter feeding to AD process is reduced by the acidogenic and methanogenic biomass activity.

5 Dynamic analysis

In order to recognize the possible steady-state solutions for model (10) it is necessary to derive the coordinates of equilibrium. Furthermore, it can be compute equilibrium point and classifier in the sense of stability criterion. Then, such information gives us the main dynamical characteristics of the model. Dynamical analysis of the AD model (10) is performed via linearization principle. Roughly speaking, the procedure consists of the following steps:

- to derive the coordinates of the equilibrium Ψ_j^* under a particular considerations from nonlinear AD model (10)
- to compute an equilibrium point ψ_i^* of the coordinate Ψ_j^* under dilution rate value D^* , nominal parameters $\pi_0 \in \Pi$ and nominal inlet operating condition.
- to find the Jacobian matrix of the nonlinear model (10)
- to compute eigenvalues $\lambda_{\psi_i^*}$ of the Jacobian matrix at an equilibrium point ψ_i^*
- to corroborate the criteria of locally asymptotically stability. Such that, if all eigenvalues have negative real parts the equilibrium point is locally asymptotically

stable. Otherwise, if there is almost one eigenvalue with positive real parts it is an unstable equilibrium point.

First, considering the trivial solution for AD model (10), the coordinate of the equilibrium Ψ_1^* is:

$$\begin{aligned} X_1^* &= 0 \\ X_2^* &= 0 \\ S_O^* &= S_{O,in} \\ V_A^* &= V_{A,in} \\ NH_4^* &= NH_{4,w} \end{aligned} \quad (12)$$

Then, for a nominal values and nominal operation condition, the equilibrium point is $\psi_1^* \in \Psi_1^* = [0.0, 0.0, 15.0, 5.0, 0.5, 0.0]^T$ [g/l] for $D^* > 0$ (Fig. 3). The eigenvalues $\lambda_{\psi_1^*}$ of the Jacobian matrix of AD model (10) at ψ_1^* are shown in Fig. 4. As eigenvalues $\lambda_{\psi_1^*}$ are positives for $D^* < 0.241$ the AD system is unstable. Nevertheless, the equilibrium point ψ_1^* is stable ($\lambda_{\psi_1^*} < 0$) for $D^* \geq 0.241$. The stable operational condition of Ψ_1^* is known as washout condition and this undesirable operation arises for $D^* \geq 0.241$. For practical proposes in real applications this value is known as the upper bound of the admissible dilution rate of operational condition $\overline{D_w} = 0.241$.

From AD model (10) under $X_1 = 0$ and $X_2 \neq 0$ restrictions, four components of the coordinate of equilibrium Ψ_2^* are:

$$\begin{aligned} X_1^* &= 0 \\ X_2^* &= \frac{(V_{A,in} - V_A^*)DY_{X2VA}}{\mu_2} \\ S_O^* &= S_{O,in} \\ NH_4^* &= NH_{4,in} \end{aligned} \quad (13)$$

and the coordinate of equilibrium for V_A is determinate for the solution of the following quadratic equation:

$$a_1 V_A^2 + b_1 V_A + c_1 = 0 \quad (14)$$

where the coefficient a_1, b_1 and c_1 are:

$$\begin{aligned} a_1 &= K_{Im2} \\ b_1 &= K_{Im1} \frac{K_{Im2} + NH_4^* K_{NH4} - \mu_{2,max} K_{Im2}}{K_{D2} + D^*} \\ c_1 &= K_{S2} K_{Im1} K_{Im2} \end{aligned} \quad (15)$$

As quadratic equation (14) has two solutions $V_{A,+}^*$ and $V_{A,-}^*$ (where $V_{A,+}^* > V_{A,-}^*$), two set of equilibrium points are found such as $V_{A,+} \in \psi_2^*$ and $V_{A,-} \in \psi_3^*$. The numerical solution of ψ_2^* and ψ_3^* are shown in Fig. 3. The eigenvalues $\lambda_{\psi_2^*}$ and $\lambda_{\psi_3^*}$ of the Jacobian matrix of AD model (10) at ψ_2^* and ψ_3^* respectively are shown in Fig. 4. As some elements of $\lambda_{\psi_2^*}$ and $\lambda_{\psi_3^*}$ are positive for all $D^* > 0$, the equilibrium point ψ_2^* and ψ_3^* are unstables, thus these equilibrium points are

not arise for $D^* > 0$. It is important to mention that for these coordinate of equilibrium $X_1 = 0$, $S_O = S_{O,in}$ and $NH_4 = NH_{4,in}$ for $t > 0$. In other words, this means that the V_A compounds within the wastewater

are partially removed by mehtanogenic bacteria (X_2). Indeed, such operation conditions does not arise in real-life experiments for one stage AD process.

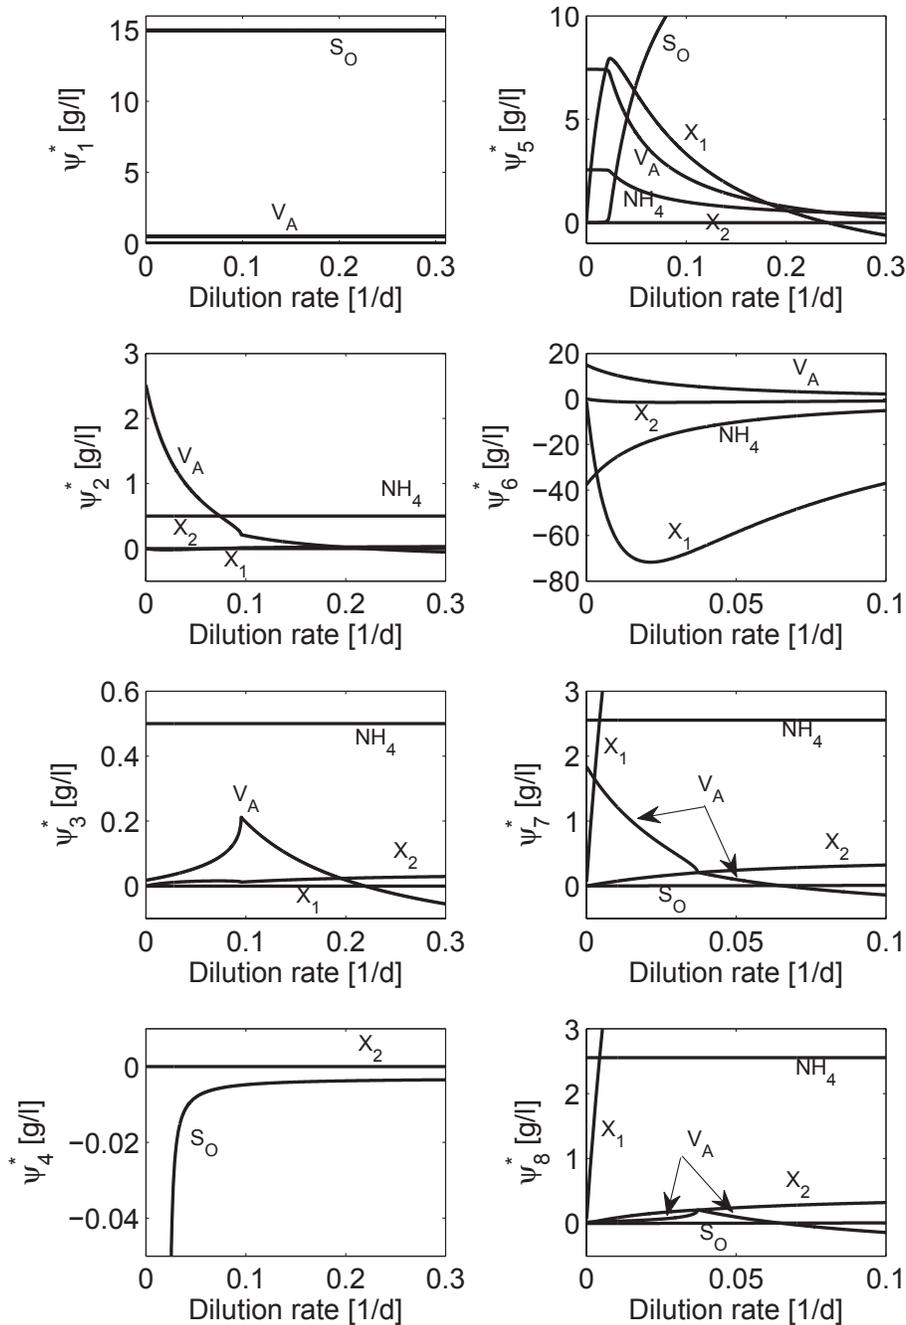


Fig. 3. Numerical solution of equilibrium point ψ_i^* for $i = 1 - 8$ with a set of nominal parameter $\pi_0 \in \Pi$ (Table 1) and nominal operational condition (Table 2).

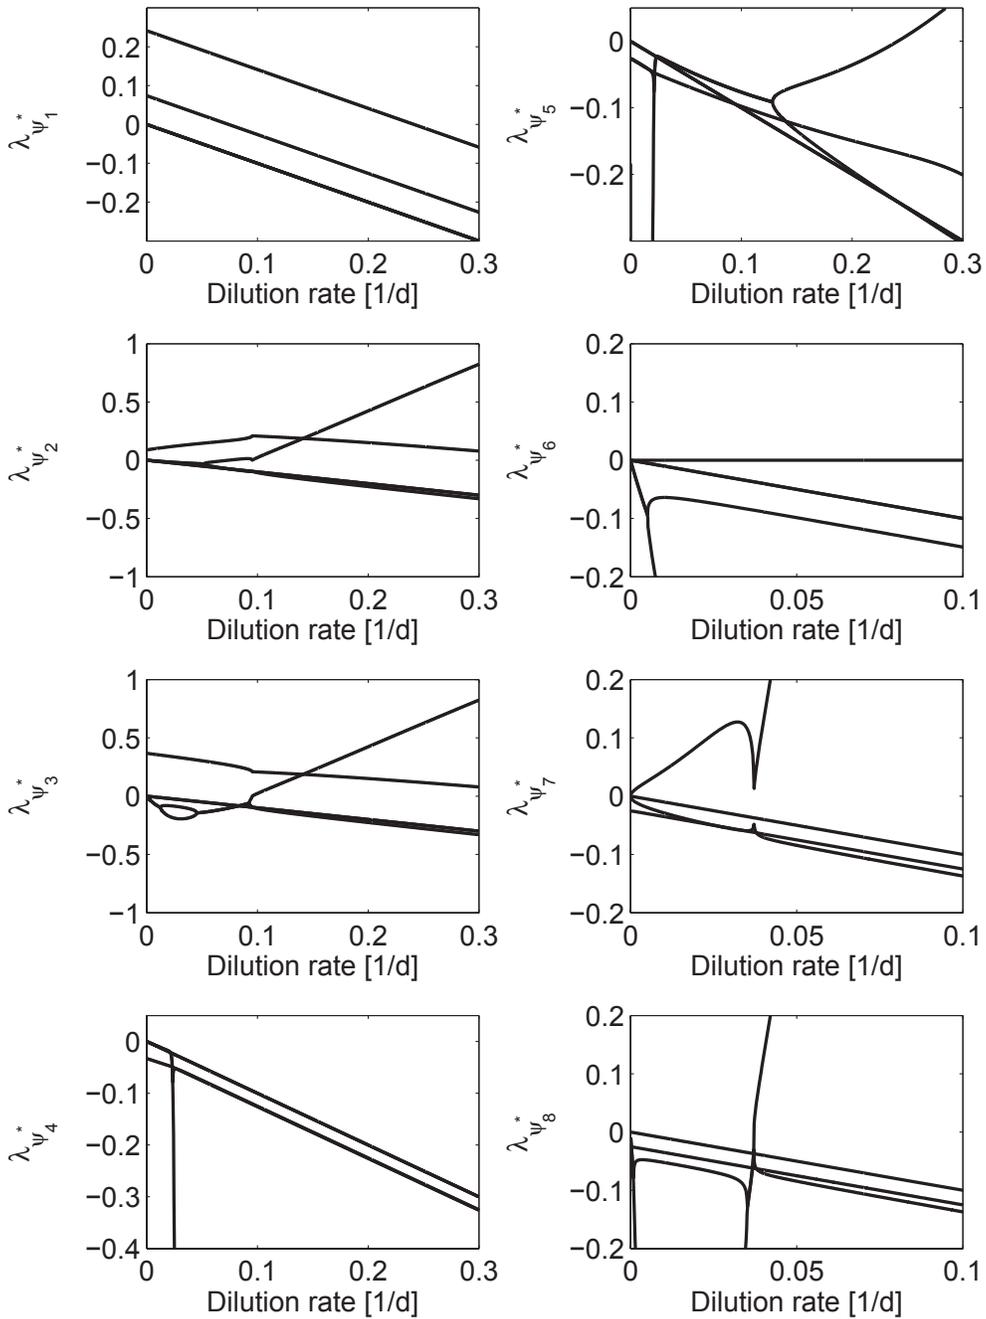


Fig. 4. Numerical solution of eigenvalue $\lambda_{\psi_i}^*$ of the Jacobian matrix of AD model (10) at ψ_i^* for $i = 1 - 8$ with a set of nominal parameter $\pi_0 \in \Pi$ (Table 1) and nominal operational condition (Table 2).

From AD model (10) under $X_2 = 0$ and $X_1 \neq 0$ restrictions, four components of the coordinate of equilibrium Ψ_3^* are:

$$\begin{aligned}
 X_1^* &= (S_{O,in} - S_o^*) \left(\frac{1}{Y_{X1}} - \frac{1}{Y_{X1SO}} \right)^{-1} \left(\frac{D^*}{\mu_1} \right) \\
 X_2^* &= 0 \\
 V_A^* &= \frac{S_{O,in} - S_o^*}{Y_{X1VA}} \left(\frac{1}{Y_{X1}} - \frac{1}{Y_{X1SO}} \right)^{-1} + V_{A,in} \\
 NH_4^* &= NH_{4,in} + \frac{\mu_1 X_1^* Y_{NH4}}{D^*}
 \end{aligned} \tag{16}$$

and the coordinate of equilibrium for S_O is determined for the solution of the following cubic equation:

$$a_2 S_O^2 + b_2 S_O + c_2 = 0 \quad (17)$$

where the coefficient a_2 , b_2 and c_2 are:

$$\begin{aligned} a_2 &= -\left(\frac{1}{Y_{X1}} - \frac{1}{Y_{X1S_O}}\right)^{-1} D^* \\ b_2 &= K_{Ia1} D^* Y_{X1VA} + \left(\frac{1}{Y_{X1}} - \frac{1}{Y_{X1S_O}}\right)^{-1} S_{O,in} D^* \\ &\quad + V_{A,in} D^* Y_{X1VA} - \frac{\mu_{1,max} K_{Ia1} D^* Y_{X1VA}}{K_{D1} + D^*} \\ c_2 &= K_{S1} K_{Ia1} Y_{X1VA} D^* \end{aligned} \quad (18)$$

As quadratic equation (17) have two solution $S_{O,+}^*$ and $S_{O,-}^*$ (where $S_{O,+}^* > S_{O,-}^*$), two set of equilibrium points are found such as $S_{O,-}^* \in \psi_4^*$ and $S_{O,+}^* \in \psi_5^*$. The numerical solution of ψ_4^* and ψ_5^* are shown in Fig. 3. Eigenvalues $\lambda_{\psi_4^*}$ and $\lambda_{\psi_5^*}$ of the Jacobian matrix of AD model (10) at ψ_4^* and ψ_5^* respectively are shown in Fig. 4. Notice that negative values $S_{O,-}^* < 0$ for $D^* > 0$ has non physical meaning, then equilibrium point ψ_4^* does not arise in real application of AD model (10). The equilibrium point ψ_5^* which has physical meaning ($\psi_5^* \in \mathfrak{R}^{5+}$) arises for $0 < D^* < 0.241$. Moreover, as all eigenvalues are negatives ($\lambda_{\psi_5^*} < 0$) for $0 < D^* < 0.241$ the equilibrium point ψ_5^* is stable for $0 < D^* < 0.241$. Notice that $D^* \geq 0.241$ is the washout condition \overline{D}_w at equilibrium point ψ_1^* . Thus the stable region of ψ_5^* is achieve for $0 < D^* < \overline{D}_w$. In order to study the physical interpretation of ψ_5^* for $0 < D^* < \overline{D}_w$ considered the accumulation of VFA ($V_A^* > V_{A,in}$ for $0 < D^* < \overline{D}_w$, $X_2^* = 0$ and $X_1^* \neq 0$). This phenomenon results from the imbalance between acidogenesis and methanogenesis leading thus to acidification. Since the methanogenesis is slower than acidogenesis and the expression μ_2 include inhibition for V_A , the equilibrium point ψ_5^* for $0 < D^* < \overline{D}_w$ is in practice the undesirable acidification condition. From AD model (10) under $X_1 \neq 0$ and $X_2 \neq 0$ restrictions, four components of the coordinate of equilibrium Ψ_4^* are:

$$\begin{aligned} X_1^* &= \frac{(E_{31} - E_{32} V_A^*)}{(E_{33} - E_{34} V_A^*) \mu_1} \\ X_2^* &= \frac{D^* Y_{X1VA} Y_{X2VA} (V_{A,in} - V_A^*) + Y_{X2VA} \mu_1 X_1^*}{Y_{X1VA} \mu_2} \\ S_O^* &= \frac{E_{11}}{E_{12} - E_{13} V_A^*} \\ NH_4^* &= \frac{E_{22} V_A^* - E_{21} - E_{23} V_A^{*2}}{E_{24} V_A^*} \end{aligned} \quad (19)$$

and the solution of the following cubic equation:

$$E_{52} V_A^3 + E_{53} V_A^2 + E_{54} V_A + E_{55} = 0 \quad (20)$$

where E_{ij} (see Appendix A) contain parameters $\pi_0 \in \Pi$ and nominal operating condition. As cubic equation (20) have three solution $V_{A,a}^*$, $V_{A,b}^*$ and $V_{A,c}^*$ (where $V_{A,a}^* \geq V_{A,b}^* \geq V_{A,c}^*$), three set of equilibrium points are found ψ_{R6}^* , ψ_{R7}^* , ψ_{R8}^* where $V_{A,a} \in \psi_6^*$, $V_{A,b} \in \psi_7^*$ and $V_{A,c} \in \psi_8^*$. Fig. 3 shows the numerical solution of ψ_6^* , ψ_7^* , and ψ_8^* . The eigenvalues $\lambda_{\psi_6^*}$, $\lambda_{\psi_7^*}$ and $\lambda_{\psi_8^*}$ of the of the Jacobian matrix of AD model (10) at ψ_6^* , ψ_7^* and ψ_8^* respectively are shown in Fig. 4. The equilibrium point ψ_6^* has non physical meaning ($X_1^* < 0$, $N_{NH4}^* < 0$) for $D^* > 0$, thus ψ_6^* does not arise in real application of AD model (10). The equilibrium point ψ_7^* has physical meaning; nevertheless, as some eigenvalues are positives for $D^* > 0$ the equilibrium point is unstable, thus ψ_7^* does not arise in real application of AD model (10). The equilibrium point ψ_8^* has physical meaning for $D < D_{PM}$ where $D_{PM} = 0.0372$, nevertheless eigenvalues $\lambda_{\psi_8^*}$ are negatives only for $0 < D^* < 0.0372$. Then ψ_8^* is a stable equilibrium point for $0 < D^* < 0.0372$. Indeed, ψ_8^* is a desirable operating condition for real application of AD model (10) known as normal operation condition ($X_1^* > 0$, $X_2^* > 0$, $S_O^* < S_{O,in}$ and $V_A^* < V_{A,in}$ for $0 < D^* < 0.0372$). Then for AD model (10), exists a lower and upper operating bound $[\underline{D}, \overline{D}]$ such that $\psi_8^* \in R_+^5 = \{\psi_8^* \in R_+^5 | \psi_{8,min} \leq \psi_8 \leq \psi_{8,max} ; \psi_{8,min} > 0 \text{ and } \psi_{8,max} < \infty\} \subset R_+^5$ where $\psi_{8,min}$ is obtained when \underline{D} is used and $\psi_{8,max}$ is obtained when \overline{D} is used. Indeed, \underline{D} is called the minimum permissible value which corresponds to the minimum dilution rate to guarantee some waste is treated and \overline{D} is the maximum permissible value to ensure stability operation. Then for AD model (10) with nominal parameters and nominal operational condition $\overline{D} = 0.0372$.

Table 3 shows the numerical evaluation of the equilibrium points ψ_i^* for $i = 1 - 8$ for a set of nominal parameter $\pi_0 \in \Pi$ and nominal operational condition. Notice that case one and case two of open loop simulation (Fig. 2) correspond to steady state of equilibrium points ψ_5^* and ψ_8^* respectively.

Table 4 depicts the summary of the numerical evaluation of stability analysis. Notice that only the equilibrium points ψ_1^* , ψ_5^* and ψ_8^* exhibit a stable region for D^* such that the equilibrium point has physical meaning. Then, without loss of generality the AD model (10) with a set of nominal parameter $\pi_0 \in \Pi$ and nominal operational condition admits the following stable equilibrium points:

Table 3. Equilibrium point values ψ_i^* for $i = 1 - 8$ of AD model (10) under nominal parameter $\pi_0 \in \Pi$ and nominal operating condition. Notice that equilibrium points ψ_5^* and ψ_8^* correspond to steady state of case one and case two of open loop simulation respectively (see Fig. 2).

Ψ_j^*	ψ_i	X_1^*	X_2^*	S_O^*	V_A^*	NH_4^*	Q_{CH4}^*
Ψ_1^*	ψ_1^*	0.0	0.0	15000.0	5000.0	500.0	0
Ψ_2^*	ψ_2^*	0.0	-16.96	15000.0	1913.7	500.0	-0.013
	ψ_3^*	0.0	5.71	15000.0	23.51	500.0	0.004
Ψ_3^*	ψ_4^*	6952.6	0.0	-6530.41	10432.4	3449.3	0.0
	ψ_5^*	4841.1	0.0	8.29	7415.9	2553.6	0.0
	ψ_6^*	-61526.5	-1173.8	205529.8	10428.4	-25599.5	-0.930
Ψ_4^*	ψ_7^*	4842.9	74.238	2.718	1232.0	2554.3	0.058
	ψ_8^*	4843.0	88.588	2.405	36.526	2554.4	0.070

Note: the units of ψ_i^* for $i = 1 - 8$ are $[mg/l]$ and Q_{CH4}^* is $[(l_{CH4}/l_{reactor})d^{-1}]$.

Table 4. Summarize of numerical evaluation of stability analysis. AC means acidification condition and NOC means normal operation condition.

Ψ_j^*	ψ_i^*	Physical meaning	No physical meaning	Stable D^* region	Unstable D^* region	Operation condition
Ψ_1^*	ψ_1^*	$D^* > 0$		$D^* \geq \overline{D}_w$	$D^* < \overline{D}_w$	Washout
Ψ_2^*	ψ_2^*	$D^* > 0$			$D^* > 0$	
	ψ_3^*	$D^* > 0$			$D^* > 0$	
Ψ_3^*	ψ_4^*		$D^* > 0$	$D^* > 0$		
	ψ_5^*	$0 < D^* < \overline{D}_w$	$D^* \geq \overline{D}_w$	$0 < D^* < \overline{D}_w$	$D^* \geq \overline{D}_w$	AC
	ψ_6^*		$D^* > 0$	$D^* > 0$		
Ψ_4^*	ψ_7^*	$0 < D^* < \overline{D}_{PM}$	$D^* \geq \overline{D}_{PM}$		$D^* > 0$	
	ψ_8^*	$0 < D^* < \overline{D}_{PM}$	$D^* \geq \overline{D}_{PM}$	$0 < D^* < \overline{D}$	$D^* \geq \overline{D}$	NOC

where $\overline{D} = 0.0372$, $\overline{D}_{PM} = 0.066$ and $\overline{D}_w = 0.241$. Notice that $\overline{D} < \overline{D}_{PM} < \overline{D}_w$.

- **Washout condition.** It is said that a digester is operating in washout condition as the biomass is inactive ($X_1, X_2 = 0$ for all $t \geq 0$) and the remaining states are given by its inlet composition ($S_O = S_{O,in}$, $V_A = V_{A,in}$, $NH_4 = NH_{4,in}$ for all $t \geq 0$). This condition arises for $D^* \geq \overline{D}_w$. Then, to avoid it, the dilution rate is constrained in practice. The washout condition is locally asymptotically stable for $D^* < \overline{D}_w$ and it becomes globally asymptotically stable for $D^* \geq \overline{D}_w$.
- **Acidification condition.** It is said that a digester is operating in acidification condition as the only methanogenic biomass is inactive ($X_1 > 0$, $X_2 = 0$ for all $t \geq 0$), accumulation of VFA is maintained ($V_A > V_{A,in}$) and some amount of organic matter is treated ($S_O < S_{O,in}$, $NH_4 < NH_{4,in}$) for all $t \geq 0$. This condition arises for $0 < D^* < \overline{D}_w$. Then, the dilution rate is constrained to avoid it in practice

under overload scenario of organic matter. The acidification condition is locally asymptotically stable for $0 < D^* < \overline{D}$ and it becomes globally asymptotically stable for $\overline{D} < D^* < \overline{D}_w$.

- **Normal operation condition.** It is said that a digester is operating in normal operation condition as the biomass is active ($X_1, X_2 > 0$ for all $t \geq 0$) and the remaining states accomplish $S_O < S_{O,in}$, and $V_A < V_{A,in}$. Then, a fraction of organic matter feeding to AD process is reduced by the acidogenic and methanogenic biomass activity. The Normal operation condition (NOC) $\Omega_{NOC}^* = \{\psi_8^* \in R_+^5 | \psi_{8,min}^* \leq \psi_8^* \leq \psi_{8,max}^* ; \psi_{8,min}^* > 0 \text{ and } \psi_{8,max}^* < \infty\} \subset R_+^5$ is locally asymptotically stable for $[\underline{D}, \overline{D}]$.

From the results obtained analytically of coordinates of equilibrium Ψ_j^* ($j = 1 - 4$) and numerical evaluation of ψ_i^* and $\lambda_{\psi_i^*}$ for $i = 1, 2, \dots, 8$ under nominal parameter $\pi_0 \in \Pi$ and nominal operational condition

the following conjecture is assessed:

Conjecture 1. Consider the anaerobic digester model $\dot{\Phi} = f(\Phi, \Pi)$. Then, assuming that the inlet composition $S_{O,in}$, $V_{A,in}$ and $NH_{4,in}$ is piecewise constant, system $\dot{\Phi} = f(\Phi, \Pi)$ has a locally asymptotically stable equilibrium point Φ_{NOC}^* for a constant $D^* \in [\underline{D}, \overline{D}]$ under normal operating condition ($X_1 > 0$, $X_2 > 0$, $S_O < S_{O,in}$, $V_A < V_{A,in}$). In addition, such an equilibrium point is contained into the close set $\Omega_{NOC} = \{\psi_{NOC}^* \in R_+^5 | \psi_{NOC,min}^* \leq \psi_{NOC}^* \leq \psi_{NOC,max}^*$; $\psi_{NOC,min}^* > 0$ and $\psi_{NOC,max}^* < \infty\} \subset R_+^5$ which contains all normal operating conditions; where $\psi_{NOC,min}^*$ is obtained for \underline{D}^* and $\psi_{NOC,max}^*$ for \overline{D}^* respectively.

It is clear that the AD model (10) has two locally stable equilibrium point under $[\underline{D}, \overline{D}]$ operation. Despite of dilution rate restriction $[\underline{D}, \overline{D}]$ the systems can rich two stable states: the desirable NOC or undesirable acidification. If a set of parameters and operating condition remain constant, to rich one of these stable states will depend on initial condition ($\Phi(t_0) = \Phi_0$). For real-life application, this assumption is considered valid for lab-scale under controlled condition, where dilution rate is maintained in a constant value and inlet composition is fixed and known. Then, AD model is candidate for application on startup lab-scale AD process under constant operation condition. Another possible application is prediction of small changes of operational condition, where variation in parameters is neglected. In other words, AD model are able to predict NOC, acidification or washout operation condition under initial condition if operation condition (inlet composition and dilution rate) and parameters are remained constant.

For real-life industrial scale application, the inlet composition is not fixed and it varies in time around a nominal value. Such variation can lead in overload organic matter and possible acidification or failure of AD process (washout). Then, in order to maintain NOC and avoid undesirable operation condition it is necessary a control scheme such that NOC is preserved.

6 Feedback control design

When AD process of OFMSW is used for treatment purposes, the control objective is the regulation of the effluent organic matter despite of fluctuations at the inlet composition (i.e. $S_{O,in}$, $V_{A,in}$). The

overall objective in AD process is the conversion of organic matter into a mixture mainly composes of methane and carbon dioxide. Then, in case of non particulate substrate or non-excessively complex organic matter, the limiting step is the conversion of volatile fatty acids into methane (Ariunbaatar et al., 2014; Fernández-Güelfo et al., 2011). In fact, VFA may accumulate provoking the undesirable acidification operation point and the overall failure of the operation. In this sense, the control problem is formulated to achieve a desirable value of V_A through the action of a control scheme.

From AD model (10), it has been shown (**Conjecture 1**) that $\dot{\Phi} = f(\Phi, \Pi)$ has a locally stable equilibrium point for NOC. Then, by selecting an adequate D^* it is possible obtain a desirable value V_A^{ref} such that $V_A^{ref} \in \Omega_{NOC}^*$. This objective is accomplished by manipulating the dilution rate D , obeying a control law. In order to design a control law the following assumptions (which are congruent with the previous discussion) are supposed:

Assumption 1. Only the V_A is available for on-line measurement.

Assumption 2. The influent concentrations for $S_{O,in}$, $V_{A,in}$ and $NH_{4,in}$ are piecewise constants, bounded and uncertain functions.

Assumption 3. The growth kinetics for the acidogenic and methanogenic stages are: smooth, bounded and uncertain functions.

Assumption 4. The dilution rate is constrained by saturation function:

$$sat(D) = \begin{cases} \overline{D} & \text{if } D \geq \overline{D} \\ D & \text{if } \underline{D} < D < \overline{D} \\ \underline{D} & \text{if } D \leq \underline{D} \end{cases} \quad (21)$$

where the bounds \underline{D} and \overline{D} are known, $D \in R_+$ and $D_{sat} = sat(D)$.

Assumption 1 is not restrictive in sense that there is available technology to measure on-line V_A by direct relationship with volatile fatty acid (VFA) or indirectly, throughout linear function with another key variable as total alkalinity. Notice that under Assumption 1-3 the controller must be restricted. For practical D is common restricted to avoid washout condition; nevertheless for AD model (10) $\dot{\Phi} = f(\Phi, \Pi)$ as $\overline{D} < \overline{D}_w$ the saturation function $sat(D)$ is restricted to upper bound \overline{D} to prevent acidification point.

In order to show the control problem is solvable a PI controller is designed. First, a linear nominal plant is derive (Khalil, 2002) from nonlinear AD model (10) at

equilibrium point ψ_{NOC}^* and nominal parameter values $\pi_0 \in \Pi$:

$$\begin{aligned} \dot{x} &= \left[\frac{\partial f(\Phi, \Pi)}{\partial \Phi} \right]_{\psi_{NOC}^*} x + \left[\frac{\partial f(\Phi, \Pi)}{\partial D} \right]_{D^*} u; \quad x(t_0) = x_0 \\ y &= [0, 0, 0, 1, 0]x \end{aligned} \quad (22)$$

where u is the input variable D and the output variable y is V_A . Then, with the dynamical characteristics of the nominal plant a controller is obtained:

$$K_0(s) = K_{p,0} + K_{i,0} \left(\frac{1}{s} \right) \quad (23)$$

where $K_{p,0}$ is the proportional constant and $K_{i,0}$ is the integral constant. Here, since nominal process model (22) is available, a classical tuning method is used in order to obtain the values of $K_0 = [K_{p,0}, K_{i,0}]$. Using Ziegler-Nichols (Yu, 2002) tuning rule a set of constants are obtained $K_0 = [K_{p,0}, K_{i,0}] = [0.0087, 0.31102]$.

The Fig. 6 shows the numerical results of the performance of the PI controller K_0 under set point changes and load disturbances (see Fig. 5) on the nonlinear AD model (10). The load disturbances are simulated with changes in $S_{O,in}$ among the nominal inlet concentration $S_{O,in} = 15$ [g/l] (Table 2). The PI controller performance remains acceptable throughout the simulations; nevertheless it is deteriorated at the set point changes. As set point changes the control input (dilution rate) can lead to undesirable operation condition of the AD process such a saturation, which it can not be accepted in practice. In order to show the performance of the controller under changes of tuning rules, a change in proportional parameter is explored under two additional controllers $K_1 = [0.75K_{p,0}, K_{i,0}]$ and $K_2 = [2K_{p,0}, K_{i,0}]$.

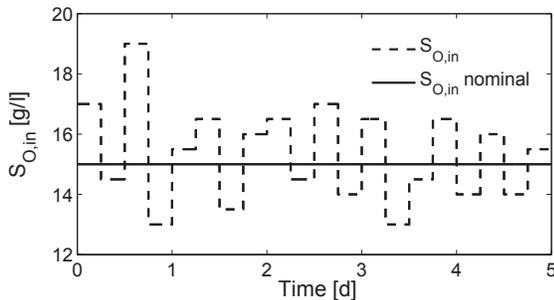


Fig. 5. Inlet concentration disturbances $S_{O,in}$ for closed-loop simulation of the controlled system. The inlet concentration $S_{O,in}$ is fixed among the nominal inlet concentration $S_{O,in} = 15$ [g/l] (Table 2).

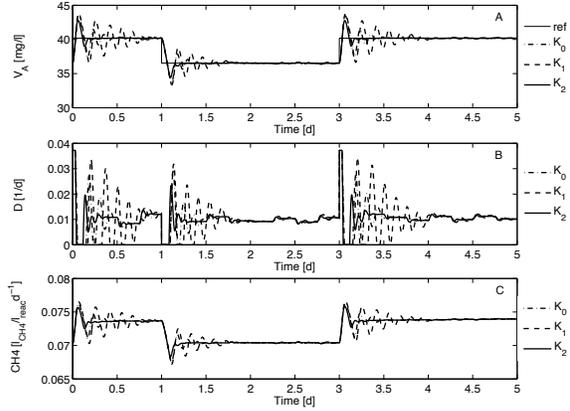


Fig. 6. Closed-loop behavior of the controlled system under inlet disturbances (see Fig. 5). A) output V_A concentration is maintained close of changes in set point concentration among the coordinate of equilibrium point $V_A^* \in \Omega_{NOC}^* = 36.5$. B) control input dilution rate D compute by the controller K_0 , K_1 and K_2 . C) estimate methane gas production rate CH_4 in the controlled system. Notice that controller K_2 achieves the set point values (V_A reference) faster with less control effort (D) than controller K_0 and K_1 .

The Fig. 6 shows the numerical results of the performance of the PI controller K_1 and K_2 under inlet disturbances (see Fig. 5). Controller K_0 shows less convergence and major control effort with respect to controller K_1 and K_2 . The controller K_2 shows less control effort and faster convergence to $V_{A,ref}$ with respect to controller K_0 and K_1 . Despite of improvement with a trial an error tuning schema, robust control strategies should be explorer.

7 Concluding remarks

A simple model of AD process of OFMSW is proposed for control process. The model includes adequate description of: (i) two metabolic stages such as acidogenesis and methanogenesis are considered; (ii) inhibition product is included; (iii) ionic equilibrium is assumed.

The AD model (10) predicts washout, acidification, and normal operation condition. These operation conditions were addressed for existence and stability criterion. Note that AD model predict acidification condition, it is important issue such that it can be used to obtain confidence intervals of operation, process design and experimental strategies with less disruption.

Under dynamical analysis, it was possible to asses

a general framework to synthesize a classical PI controller. Numerical simulations showed that under nominal parameter is possible achieve stabilization of no linear AD process of OFMSW under inlet disturbances. For some change of set point and persistent disturbances the controller present performance organic matter degradation, for these cases is necessary a different framework in order to face this issue; indeed, results in this direction will be reported elsewhere.

References

- Alatqi I.M.; Dadkhah A.L.; Akbar A.M.; Hamouda M.F. (1994). Comparison between dynamics and control performance of mesophilic and thermophilic anaerobic sludge digesters. *The Chemical Engineering Journal and the Biochemical Engineering Journal* 55, B55-B66.
- Ariunbaatar J.; Panico A.; Esposito G.; Pirozzi F.; Lens N.L. (2014). Pretreatment methods to enhance anaerobic digestion of organic solid waste *Applied Energy* 123, 143-153.
- Bolzonella D.; Battistoni P.; Mata-Alvarez J.; Cecchi F. (2003). Anaerobic digestion of organic solid wastes: process behaviour in transient conditions. *Water Science and Technology* 48, 1-8.
- Cesaro A.; Belgiorno V. (2014). Pretreatment methods to improve anaerobic biodegradability of organic municipal solid waste fractions. *Chemical Engineering Journal* 240, 24-37.
- Cuevas-Ortiz, F. A.; Neria-González, M. I.; Aguilar-López R. (2015). Nonlinear observer for switched systems: application to a batch bioreactor. *Revista Mexicana de Ingeniería Química* 14, 137-147.
- Esposito G.; Frunzo L.; Panico A. d'Antonio G. (2008). Mathematical modelling of disintegration-limited co-digestion of OFMSW and sewage sludge. *Water Science and Technology* 58, 1513-1519.
- Esposito G.; Frunzo L.; Panico A. d'Antonio G. (2011a). Model calibration and validation for OFMSW and sewage sludge co-digestion reactors. *Waste Management* 31, 2527-2535.
- Esposito G.; Frunzo L.; Panico A. d'Antonio G. (2011b). Modelling the effect of the OLR and OFMSW particle size on the performances of an anaerobic co-digestion reactor. *Process Biochemistry* 46, 557-565.
- Fernández J.; Pérez M.; Romero L.I. (2010). Kinetics of mesophilic anaerobic digestion of the organic fraction of municipal solid waste: Influence of initial total solid concentration. *Bioresource Technology* 101, 6322-6328.
- Fernández-Güelfo L.A.; Alvarez-Gallego C.; Marquez D.S.; Garcia L.I. (2011). Biological pretreatment applied to industrial organic fraction of municipal solid wastes (OFMSW): Effect on anaerobic digestion. *Chemical Engineering Journal* 172, 321-325.
- Gómez-Acata, R. V., Lara-Cisneros, G.; Femat, R.; Aguilar-López, R. (2015). On the dynamic behaviour of a class of bioreactor with Non-conventional yield coefficient form. *Revista Mexicana de Ingeniería Química* 14, 149-165.
- Havlik I.; Voturba J.; Sobotka M. (1986). Mathematical modeling of the anaerobic digestion process: Application of dynamic mass-energy balance. *Folia Microbiologica* 31, 56-69.
- Hill, D. T.; Barth, C. L. (1977). A Dynamic Model for Simulation of Animal Waste Digestion. *Water Pollution Control Federation* 49, 2129-2143.
- Jimenez, J.; Latrille, E.; Harmand, J.; Robles, A.; Ferrer, J.; Gaida, D.; Wolf, C.; Mairet, F.; Bernard, O.; Alcaraz-Gonzalez, A.; Mendez-Acosta, H.; Zitomer, D.; Totzke, D.; Spanjers, H.; Jacobi, F.; Guwy, A.; Dinsdale, R.; Premier, G.; Mazhegrane, S.; Ruiz-Filippi, G.; Seco, A.; Ribeiro, T.; Pauss, A.; Steyer, J. P. (2015). Instrumentation and control of anaerobic digestion processes: a review and some research challenges. *Reviews in Environmental Science and Biotechnology* 14, 615-648.
- Khalil, H. K. (2002). *Nonlinear Systems*; Prentice Hall: New Jersey.
- Kiely, G.; Tayfur, G.; Dolan, C.; Tanji, K. (1997). Physical and mathematical modelling of anaerobic digestion of organic wastes. *Water Research* 31, 534-540.

- Mata-Alvarez, J.; Macé, S.; Llabrés P. (2000). Anaerobic digestion of organic solid waste. An overview of research achievements and perspectives. *Biosource Technology* 74, 3-16.
- Méndez-Acosta, H. O.; Palacios-Ruiz, B.; Alcaraz-González, V.; Steyer, J. P.; González-Álvarez, V.; Latrill, E. (2008) Robust Control of Volatile Fatty Acids in Anaerobic Digestion Processes *Industrial Engineering Chemical Research* 47, 7715-7720.
- Moletta R.; Verrier D.; Albagnac G. (1986). Dynamic modelling of anaerobic digestion. *Water Research* 20, 427-434.
- Myint, M.; Nirmalakhandan, N.; Speecec, R.E. (2007) Anaerobic fermentation of cattle manure: Modeling of hydrolysis and acidogenesis *Water Research* 41, 323-332.
- Nopharatana A.; Pullammanappallil P.C.; Clarke W.P. (2003). A dynamic mathematical model for sequential leach bed anaerobic digestion of organic fraction of municipal solid waste. *Biochemical Engineering Journal* 13, 21-33.
- Nopharatana A.; Pullammanappallil P.C.; Clarke W.P. (2007). Kinetics and dynamic modelling of batch anaerobic digestion of municipal solid waste in a stirred reactor. *Waste Management* 13, 395-603.
- Pavan P.; Battistoni P.; Cecchi F.; Mata-Alvarez J. (2000). Two-phase anaerobic digestion of source sorted OFMSW (organic fraction of municipal solid waste): performance and kinetic study. *Water Science and Technology* 41, 111-118.

Vavilin V.A.; Rytov S.V.; Lokshina L.Y.; Pavlostathis S.G.; Barlaz M.A. (2003). Distributed Model of Solid Waste Anaerobic Digestion. Effects of Leachate Recirculation and pH Adjustment. *Biotechnology and Bioengineering* 81, 33-73.

William, H. P.; Teukolsky S. A.; Vetterling W. T.; Flannery, B. P. (1992). *Numerical Recipes in C. The art of Scientific Computing*. Cambridge University Press: Cambridge.

Yu, Cheng-Ching. (2006). *Autotuning of PID controllers*. Springer-Verlag: London.

Appendix A

The E_{ij} for $i, j = 1, 2, 3, 4, 5$ terms of the equation (19) and (20) are the following:

$$\begin{aligned}
 E_{11} &= (K_{D^*1} + D^*) K_{S1} K_{Ia1} \\
 E_{12} &= \mu_{1,max} K_{Ia1} - (K_{D^*1} + D^*) K_{Ia1} \\
 E_{13} &= (K_{D^*1} + D^*) \\
 E_{21} &= (K_{D^*2} + D^*) K_{Im1} K_{Im2} K_{S2} \\
 E_{22} &= \mu_{2,max} K_{Im1} K_{Im2} - (K_{D^*2} + D^*) K_{Im1} K_{Im2} \\
 E_{23} &= (K_{D^*2} + D^*) K_{Im2} \\
 E_{24} &= (K_{D^*2} + D^*) K_{Im1} K_{NH4} \\
 E_{31} &= Y_{X1} Y_{X1S} O D^* (S_{O,in} E_{12} - E_{11}) \\
 E_{32} &= Y_{X1} Y_{X1S} O D^* S_{O,in} E_{13} \\
 E_{33} &= (Y_{X1S} O - Y_{X1}) E_{12} \\
 E_{34} &= (Y_{X1S} O - Y_{X1}) E_{13} \\
 E_{51} &= -D^* \\
 E_{52} &= E_{51} E_{34} E_{23} \\
 E_{53} &= -D^* N H_{4,in} E_{24} E_{34} - Y_{NH4} E_{24} E_{32} - E_{51} E_{34} E_{22} - E_{51} E_{33} E_{23} \\
 E_{54} &= D^* N H_{4,in} E_{24} E_{33} + Y_{NH4} E_{24} E_{31} + E_{51} E_{21} E_{34} + E_{51} E_{33} E_{22} \\
 E_{55} &= E_{51} E_{21} E_{33}
 \end{aligned}$$